

| | | | | |
|-------------------------------------------------------------------------|--|-----|--------------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

SPECIFICATION FOR

Module:YS-T035035 V1.0

| | | | |
|-------------|----------------|-----------------------|-------------|
| Designed by | R&D Checked by | Quality Department by | Approved by |
| | | | |

Approval by Customer:

OK

NG, Problem survey

Approved By _____

Revision Record

| REV NO. | REV DATE | Contents Before Change | Contents After Change | Note |
|---------|------------|------------------------|-----------------------|------|
| V1.0 | 2021/10/28 | NEW ISSUE By Pan; | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| | | | | |
|-------------------------------------------------------------------------|--|-----|--------------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

Contents

| List | Description | Page No. |
|------|-------------------------------------------|----------|
| | Cover | 1 |
| | Revision Record | 2 |
| | Contents | 3 |
| 1 | Technical parameters | 4 |
| 2 | Block Dimension | 5 |
| 3 | Outline Dimensions | 6 |
| 4 | Input terminal Pin Assignment Description | 7 |
| 5 | LCD Optical Characteristics | 8 |
| 6 | TFT Electrical Characteristics | 11 |
| 7 | Timing Characteristics | 13 |
| 8 | Inspection Standard | 15 |
| 9 | Reliability Test Conditions and Methods | 20 |
| 10 | Cautions and Handling Precautions | 22 |
| 11 | Packing Method | 25 |


| | | | | |
|-------------------------------------------------------------------------|--|-----|--------------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

1. Technical parameters


| ITEM | STANDARD VALUES | UNITS |
|------------------------|----------------------------------------|-------|
| LCD type | 3.5TFT | -- |
| Dot arrangement | 320(RGB)×480 | dots |
| Color filter array | RGB vertical stripe | -- |
| Display mode | TN / Transmission / Normally White | - |
| Eyes Viewing Direction | 12:00 | -- |
| Driver IC | ILI9488 | -- |
| Module size | 55.50(W)×84.92(H)×2.45(T)(Exclude FPC) | mm |
| Active area | 48.96(W)×73.44(H) | mm |
| Interface | MCU8Bit_16Bit | -- |
| Operating temperature | -20 ~ +70 | °C |
| Storage temperature | -30 ~ +80 | °C |
| Back Light | White LED*6 | -- |

| | | | | |
|-------------------------------------------------------------------------|--|-----|--------------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

2. Block Dimension

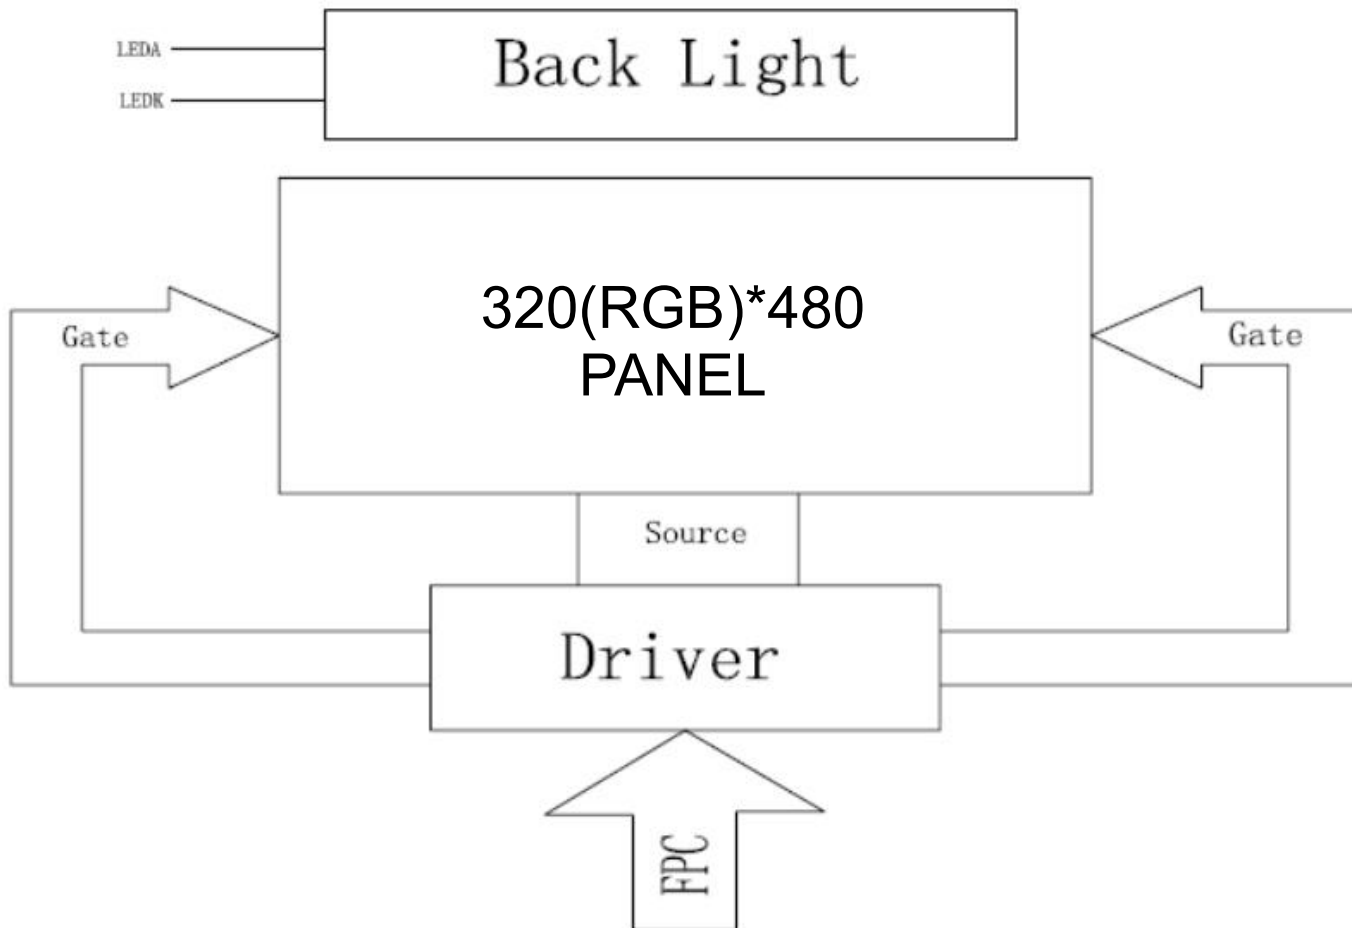

3. Outline Dimension

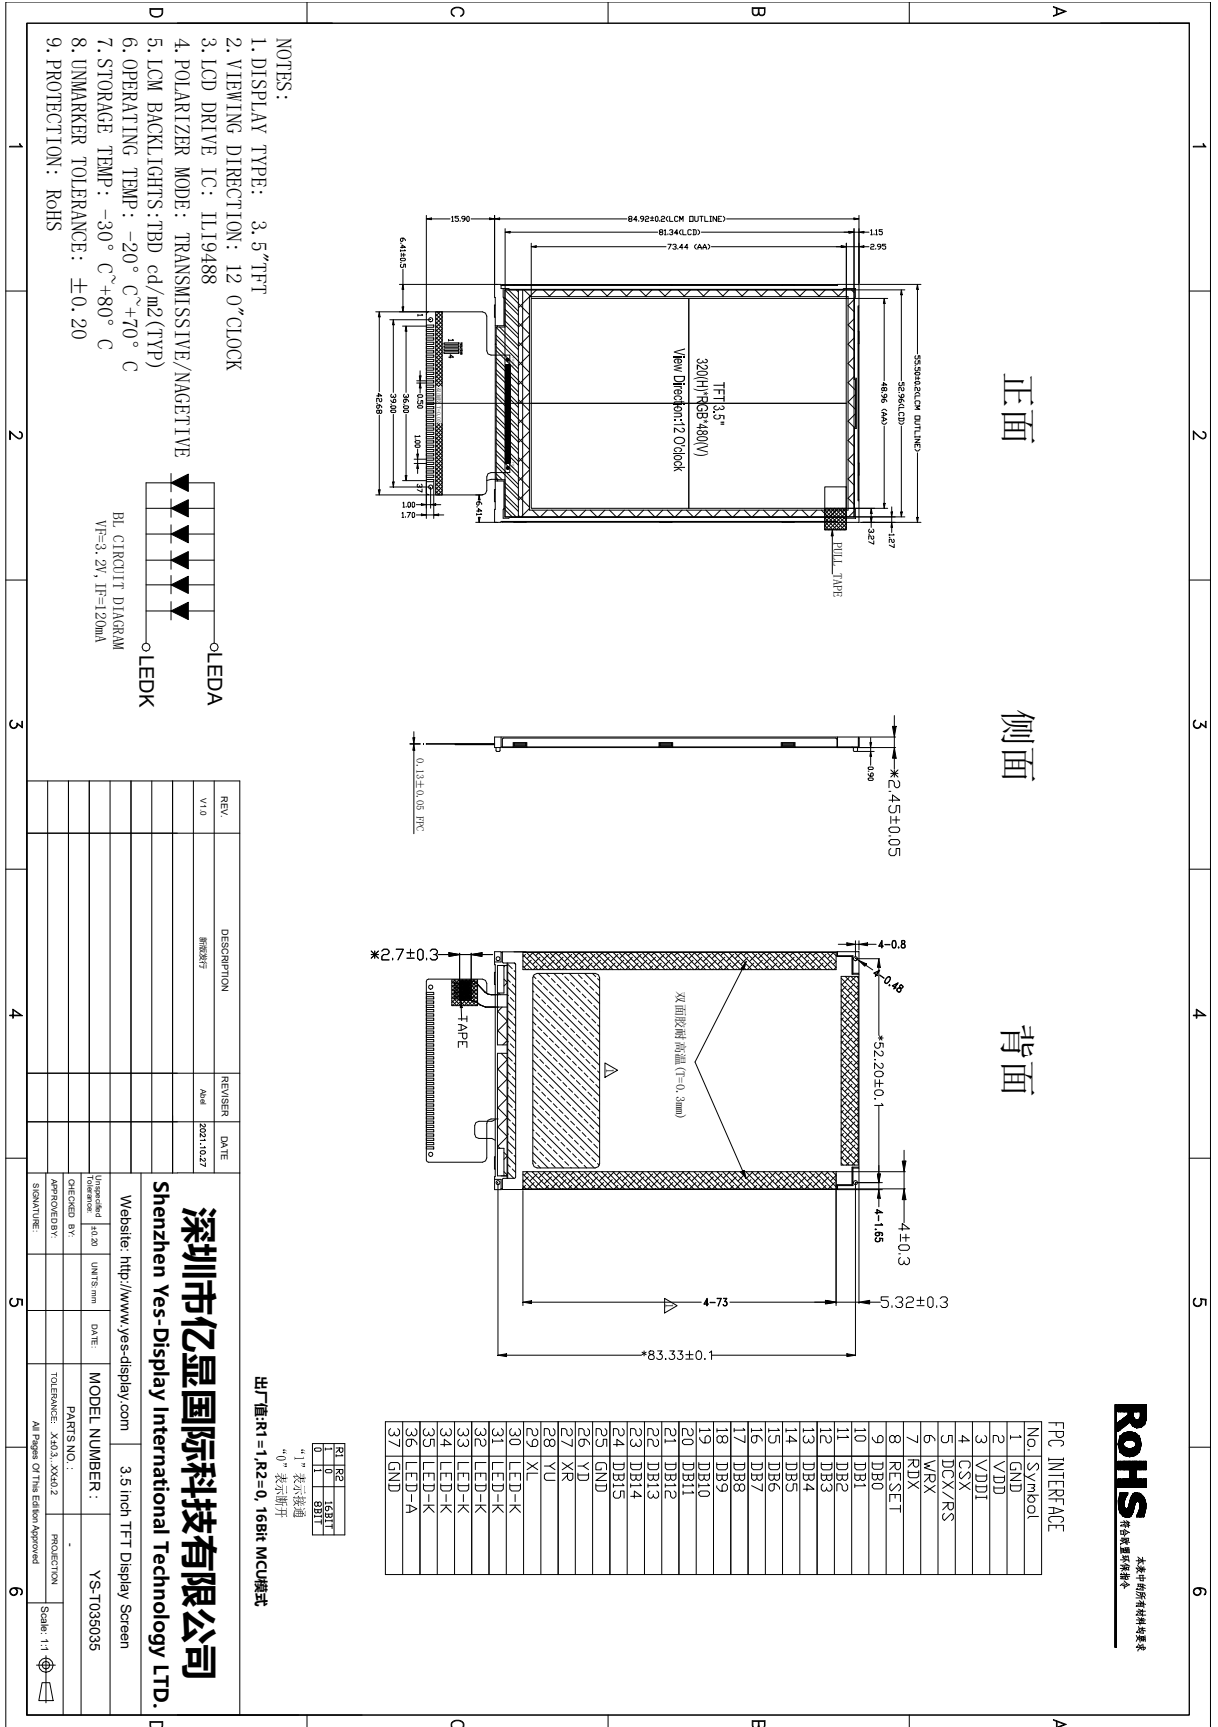

| | | | | |
|-------------------------------------------------------------------------|--|-----|--------------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

4. Input terminal Pin Assignment Description

4.1 LCD Pin Description

| PIN NO. | PIN NAME | DESCRIPTION |
|---------|----------|-----------------------------------------------------------------------------------------------------------------------------|
| 1 | GND | System ground |
| 2 | VDD | 3.3V Power supply for digital circuits |
| 3 | VDDI | 1.8V IO VDD Power supply for digital circuits |
| 4 | CSX | Chip select input pin ("Low" enable). |
| 5 | DCX/RS | Input pin for chip selection signal. |
| 6 | WRX | 1. Write enable pin I80 parallel bus system interface; 2. Display data/command selection pin in 4-line serial interface; |
| 7 | RDX | Read enable pin I80 parallel bus system interface. |
| 8 | RESET | Reset pin. Initializes the IC, when this signal is low. Must be reset after power is stable. |
| 9-24 | DB0-DB15 | DATA BUS |
| 25 | GND | System ground |
| 26 | YD | RTP YD |
| 27 | XR | RTP XR |
| 28 | YU | RTP YU |
| 29 | XL | RTP XL |
| 30-35 | LEDK | Power supply for backlight cathode input terminal. |
| 36 | LEDA | Power supply for backlight anode input terminal. |
| 37 | GND | System ground |

| | | |
|----|----|-------|
| R1 | R2 | |
| 1 | 0 | 16BIT |
| 0 | 1 | 8BIT |

“1” 表示接通

“0” 表示断开

4.2 TP Pin Description

TBD


5. LCD Optical Characteristics

4.0 OPTICAL CHARACTERISTICS


4.1 Optical specification

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit | Note |
|--------------------------------------|---------|-----------------------------------------------|------------|-------|-------|------|------------------------------------------------------------------------------|
| Transmittance (without Polarizer) | T (%) | — | 13.13 | 14.59 | — | — | |
| Contrast Ratio | CR | $\theta=0$ Normal viewing angle — | 400 | 500 | — | — | (1)(2) CR base on using EWV Polarizer · Reference Only |
| Response time | Rising | T_R | — | 4 | 8 | msec | (1)(3) |
| | Falling | T_F | — | 12 | 24 | | |
| Color gamut | S(%) | | 54 | 60 | — | % | |
| Color chromaticity (CIE 1931) | White | W_x | 0.273 | 0.303 | 0.333 | | (1)(4) CF glass |
| | | W_y | 0.295 | 0.325 | 0.355 | | |
| | Red | R_x | 0.608 | 0.628 | 0.648 | | |
| | | R_y | 0.314 | 0.334 | 0.354 | | |
| | Green | G_x | 0.257 | 0.277 | 0.297 | | |
| | | G_y | 0.529 | 0.549 | 0.589 | | |
| Blue | B_x | 0.122 | 0.142 | 0.162 | | | |
| | B_y | 0.102 | 0.122 | 0.142 | | | |
| Viewing angle | Hor. | θ_L | 60 | 70 | — | | Viewing Angle base on using EWV Polarizer · Reference Only |
| | | θ_R | 60 | 70 | — | | |
| | Ver. | θ_U | 60 | 70 | — | | |
| | | θ_D | 40 | 60 | — | | |
| Optima View Direction | | | 12 o'clock | | | | (5) |

Note (1) Measurement Setup: The LCD module should be stabilized at given temp. 25°C for 15 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 15 minutes in a windless room.

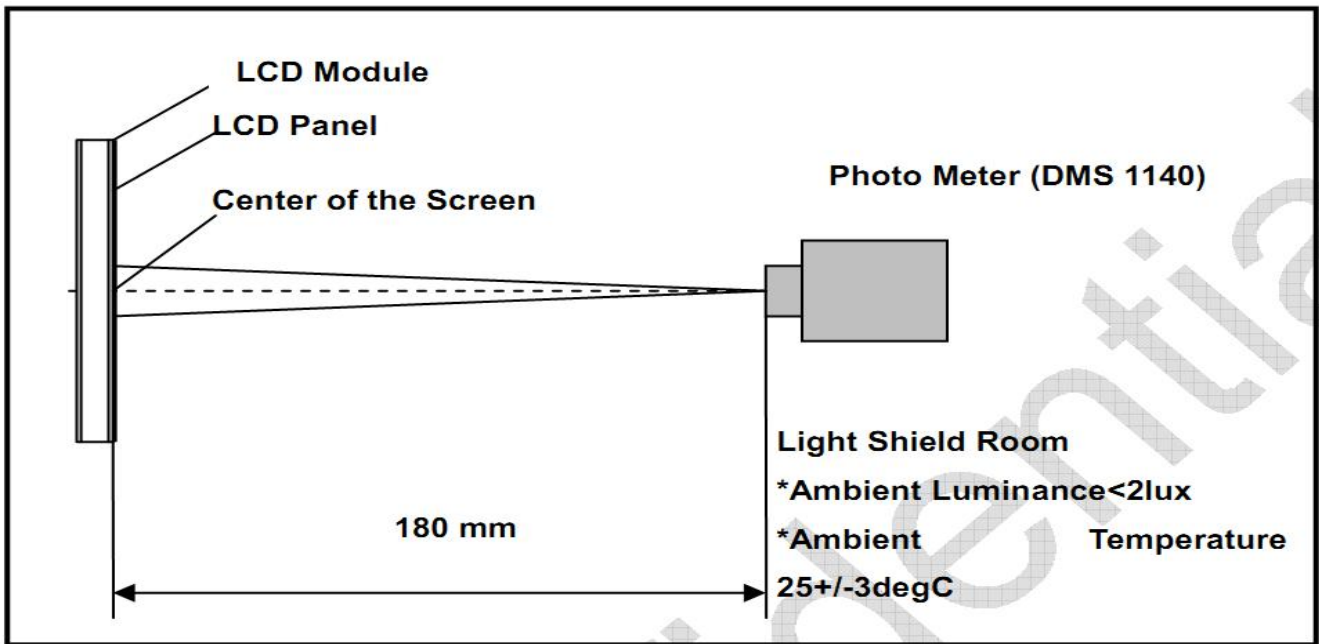

Note (2) Definition of Viewing Angle

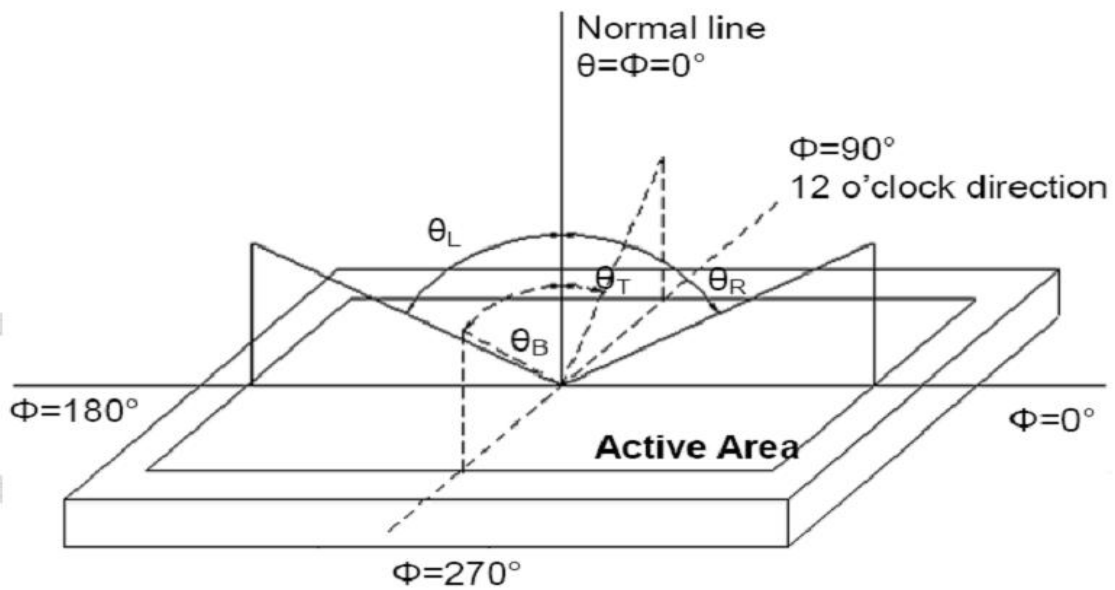

Note (3) Definition of Contrast Ratio (CR)


The contrast ratio can be calculated by the following expression

$$\text{Contrast Ratio (CR)} = L_{63} / L_0$$

L63: Luminance of gray level 63, L0: Luminance of gray level 0

Note (4) Definition of response time

| | | | | |
|-------------------------------------------------------------------------|--|-----|-------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

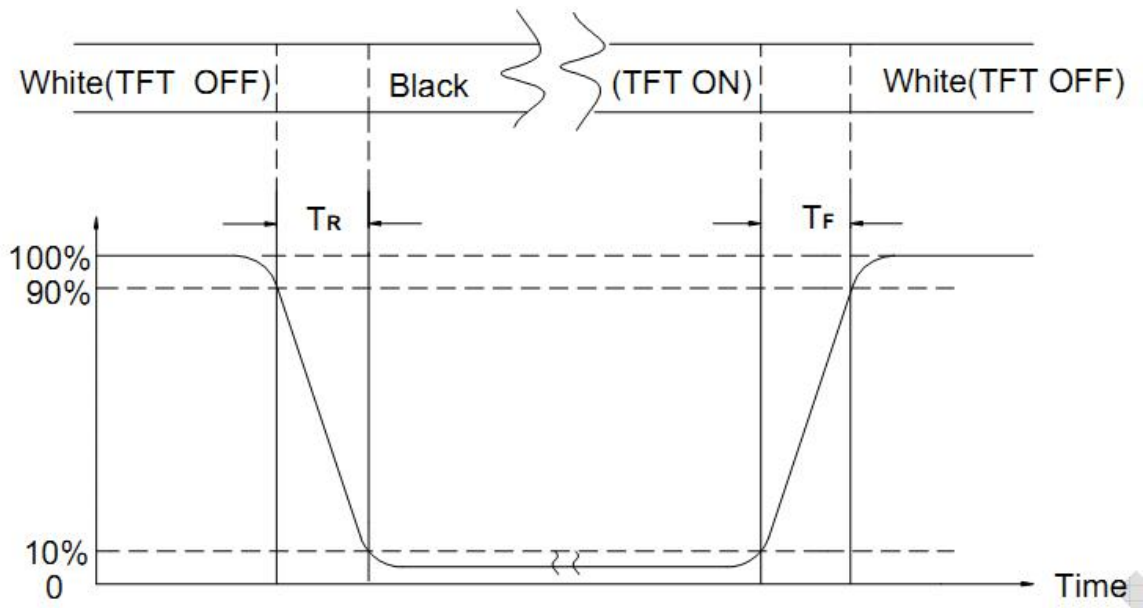

Note (5) Definition of Transmittance (Module is without signal input)

$$\text{Transmittance} = \text{Center Luminance of LCD} / \text{Center Luminance of Back Light} \times 100\%$$

Note (6) Definition of color chromaticity (CIE1931)

Color coordinates measured at the center point of LCD

| | | | | |
|-------------------------------------------------------------------------|--|-----|-------------------------------------------|----------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

6. TFT Electrical Characteristics


6.1 Absolute Maximum Ratings

| Item | Symbol | Min. | Max. | Unit |
|-----------------------|--------|------|---------|------|
| Logic Supply Voltage | VDD | -0.3 | 4.0 | V |
| Input Voltage | Vin | -0.3 | VDD+0.3 | V |
| Operating Temperature | TOP | -20 | 70 | °C |
| Storage Temperature | TST | -30 | 80 | °C |
| Storage Humidity | HD | 20 | 90 | %RH |

6.2 DC Characteristics

| Item | Symbol | Min. | Typ. | Max. | Unit | Remark |
|----------------------|-----------------|---------|------|---------|------|--------|
| Logic Supply Voltage | VDD | 2.5 | 2.8 | 3.3 | V | - |
| Input High Voltage | V _{IH} | 0.7VDD | - | VDD | V | - |
| Input Low Voltage | V _{IL} | GND | - | 0.3 VDD | V | - |
| Output High Voltage | V _{OH} | 0.8 VDD | - | VDD | V | - |
| Output Low Voltage | V _{OL} | GND | - | 0.2 VDD | V | - |
| I/O Leak Current | I _{LI} | -1 | - | 1 | uA | - |
| Supply Current | IDD | - | TBD | - | mA | - |

6.3 LED Backlight Characteristics

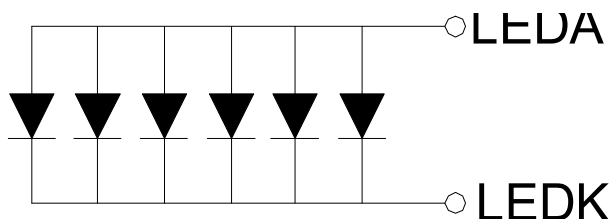

BL CIRCUIT DIAGRAM
 VF=3.2V, IF=120mA

| Item | Symbol | MIN | TYP | MAX | UNIT | Test Condition |
|----------------------------|--------|-----|-----|-----|-------------------|----------------|
| Supply Voltage | Vf | 2.8 | 3.2 | 3.6 | V | |
| Supply Current | If | - | 120 | - | mA | - |
| Luminous Intensity for LCM | - | - | - | - | cd/m ² | |

| | | | | | |
|---------------------------------------------------------------------------------------|--|------------|---------------------------------------------------------|----------------------------------------------------------------------------|--|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | | |
| File NO. | | REV | A/01 | http://www.yes-display.com | |

| | | | | | | |
|--------------------|-------|---|-------|---|----|---------|
| Uniformity for LCM | - | - | 60 | - | % | If=40mA |
| Life Time | - | - | 50000 | - | Hr | If=40mA |
| Backlight Color | White | | | | | |

7. Timing Characteristics

7.1 TFT Timing Characteristics

7.1.1 Display Serial Interface Timing Characteristics (MCU 8080 system)

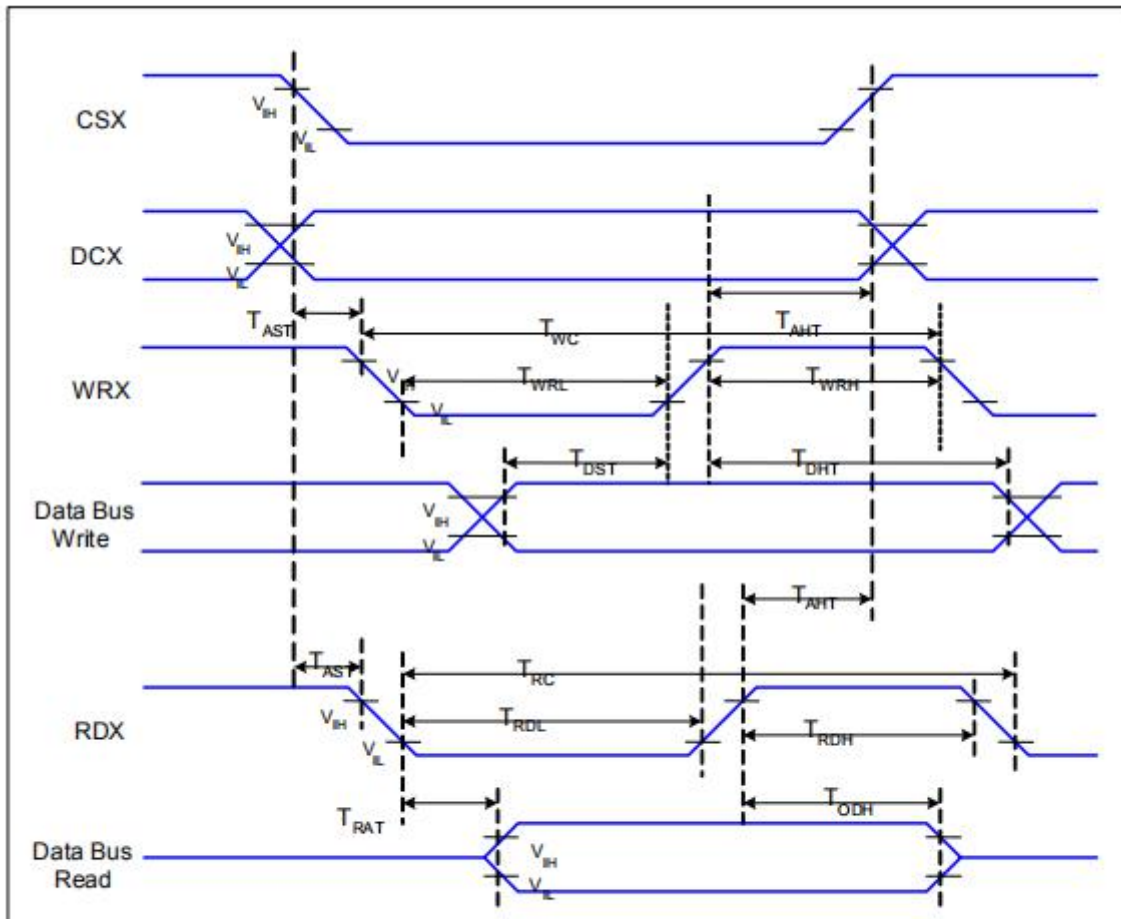


Figure 2 Parallel Interface Timing Characteristics (8080-Series MCU Interface)

$V_{DD1}=1.65$ to V_{DD} , $V_{DD}=2.5$ to $3.3V$, $AGND=DGND=0V$, $T_a=25$ °C

| Signal | Symbol | Parameter | Min | Max | Unit | Description |
|--------|--------|---------------------------------|-----|-----|------|-------------------|
| DCX | TAST | Address Setup Time | 0 | -- | ns | |
| | TAHT | Address Hold Time (Write/Read) | 2 | -- | ns | |
| WRX | TWC | Write Cycle | 75 | -- | ns | |
| | TWRH | Control Pulse "H" Duration | 25 | -- | ns | |
| | TWRL | Control Pulse "L" Duration | 30 | -- | ns | |
| RDX | TRC | Read Cycle (ID) | 450 | -- | ns | |
| | TRDH | Control Pulse "H" Duration (ID) | 250 | -- | ns | When Read ID Data |
| | TRDL | Control Pulse "L" Duration (ID) | 170 | -- | ns | |

| Signal | Symbol | Parameter | Min | Max | Unit | Description |
|----------|--------|-----------------------|-----|-----|------|------------------------------------------------------------------------------------------------------|
| DB[17:0] | TDST | Data Setup Time | 20 | -- | ns | TRAT, TRATFM: 3K ohm Pull up or Down and 30pF Parallel Cap. To GND. TODH: 3K ohm Pull up or Down. |
| | TDHT | Data Hold Time | 10 | -- | ns | |
| | TRAT | Read Access Time (ID) | -- | 150 | ns | |
| | TODH | Output Disable Time | 10 | -- | ns | |

Table 3 8080 Parallel Interface Characteristics


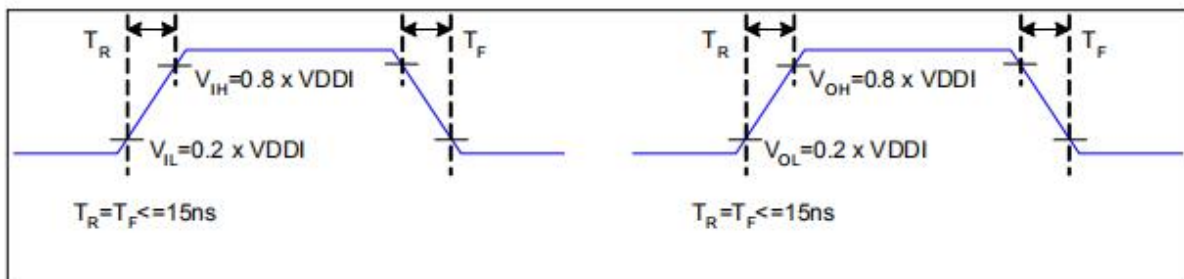


Figure 3 Rising and Falling Timing for I/O Signal

Note: The rising time and falling time (T_r , T_f) of input signal and fall time are specified at 15 ns or less. Logic high and low levels are specified as 20% and 80% of VDDI for Input signals.

7.1.2 Reset Timing Characteristics

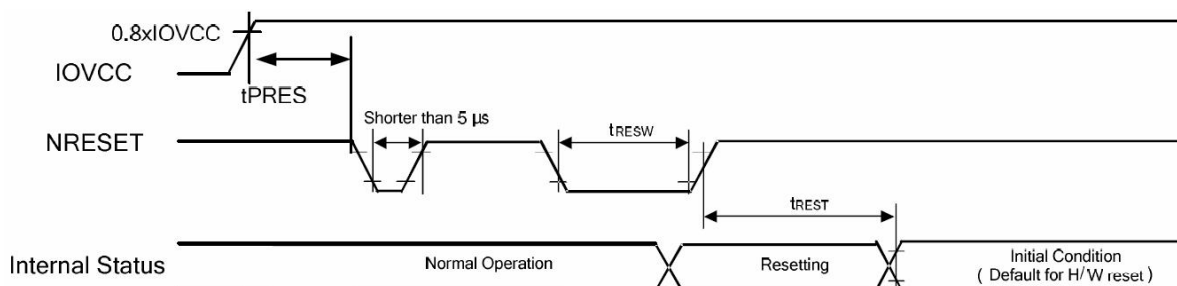

7.1.3 Power on/off timing sequence check the IC datasheet!

7.2 TP Timing Characteristics

TBD

| | | | | |
|-------------------------------------------------------------------------|--|-----|--------------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

8. Inspection Standard

8.1 Incoming Inspection and Standard:

The below incoming inspection are applied to the TFT LCM Modules supplied by ShenZhen Yes-Display International Technology CO.,LTD. The customers should inspect the LCM within 14 days after receiving the goods. The result of inspection should be notified to the Seller in the writing copy promptly, if the customer do not send them within 14 days, the seller has the right to judge as acceptance of goods. The inspection lot size is treated as the quantity per shipment and per model. The sampling plan shall be inspected under MIL-STD015E in Level II by single sampling. The acceptable quality level (AQL) are categorized as below grades:

CRITICAL= 0.4%, MAJOR= 0.65%, MINOR= 1.5%

8.2 Inspection condition and Warranty policy:

The delivered LCM should be stored properly, ideally under climate-controlled environment at 25 (±5) degree Celsius as well as 60% (±10) Relative Humidity. The LCM shall be inspected in the viewing angle of 45 degree from the four major angles (U/D/L/R) under the single fluorescent lamp of 20W (equal to 300 to 500 lux). For warranty, ShenZhen Yes-Display International Technology CO.,LTD. will provide 12 months of warranty period as standard, and provide the new replacement for the defective products which belong to the Seller's responsibility verified by the quality department.

8.3 Inspection Criteria:

8.3.1 Critical defect

| Item No. | Inspection content | Judgement |
|----------|--------------------|--------------------------------------------------------------------------------------------------------------------|
| 8.3.1.1 | Functional defects | No display, abnormal display, short circuit, missing line, off-contrast and chromaticity, Touch Panel non-function |
| 8.3.1.2 | Model mixed | Other model mixed |


8.3.2 Major defect:





| Item No. | Inspection content | Judgement |
|----------|--------------------|----------------------------------------------------------------|
| 8.3.2.1 | Product indication | Missing model no. and wrong model no. is indicated on the LCM. |
| 8.3.2.2 | Glass cracking | The LCD and touch panel glass crack or breakage |

| | | | | |
|-------------------------------------------------------------------------|--|-----|--------------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

| | | |
|---------|-------------------|---------------------------------------------------------------|
| 8.3.2.3 | Missing component | The function component missing such as connector, cable, etc. |
|---------|-------------------|---------------------------------------------------------------|

8.3.3 Minor defect (LCD) :

| Item No. | Inspection content | Judgement | | | | | | | | | | | | |
|------------------------|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------|-----------------|--------|------------------------|------------------|---------------|----------------------|---|--|------------|----------------|
| 8.3.3.1 | Black/White spot Foreign particles Dust in the cell | $\varphi = (x+y) / 2$  <table border="1"> <thead> <tr> <th>Diameter (mm)</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.1$</td> <td>Ignore</td> </tr> <tr> <td>$0.1 < \Phi \leq 0.25$</td> <td>3 (Distance>5mm)</td> </tr> <tr> <td>$0.25 < \Phi$</td> <td>Not allowed</td> </tr> </tbody> </table> | Diameter (mm) | Acceptable Q'ty | $\Phi \leq 0.1$ | Ignore | $0.1 < \Phi \leq 0.25$ | 3 (Distance>5mm) | $0.25 < \Phi$ | Not allowed | | | | |
| Diameter (mm) | Acceptable Q'ty | | | | | | | | | | | | | |
| $\Phi \leq 0.1$ | Ignore | | | | | | | | | | | | | |
| $0.1 < \Phi \leq 0.25$ | 3 (Distance>5mm) | | | | | | | | | | | | | |
| $0.25 < \Phi$ | Not allowed | | | | | | | | | | | | | |
| 8.3.3.2 | Linear defect Black/white line Black/white scratch | <table border="1"> <thead> <tr> <th>Length(mm)</th> <th>Width (mm)</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td></td> <td>$W \leq 0.03$</td> <td>Ignore</td> </tr> <tr> <td>$L \leq 5.0$</td> <td>$0.03 < W \leq 0.07$</td> <td>3</td> </tr> <tr> <td></td> <td>$0.07 < W$</td> <td>Follow 8.3.3.1</td> </tr> </tbody> </table> | Length(mm) | Width (mm) | Acceptable Q'ty | | $W \leq 0.03$ | Ignore | $L \leq 5.0$ | $0.03 < W \leq 0.07$ | 3 | | $0.07 < W$ | Follow 8.3.3.1 |
| Length(mm) | Width (mm) | Acceptable Q'ty | | | | | | | | | | | | |
| | $W \leq 0.03$ | Ignore | | | | | | | | | | | | |
| $L \leq 5.0$ | $0.03 < W \leq 0.07$ | 3 | | | | | | | | | | | | |
| | $0.07 < W$ | Follow 8.3.3.1 | | | | | | | | | | | | |
| 8.3.3.3 | Polarizer Bubbles Dent on polarizer | <table border="1"> <thead> <tr> <th>Diameter (mm)</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.2$</td> <td>Ignore</td> </tr> <tr> <td>$0.2 < \Phi \leq 0.5$</td> <td>2 (Distance>5mm)</td> </tr> <tr> <td>$0.5 < \Phi$</td> <td>Not allowed</td> </tr> </tbody> </table> | Diameter (mm) | Acceptable Q'ty | $\Phi \leq 0.2$ | Ignore | $0.2 < \Phi \leq 0.5$ | 2 (Distance>5mm) | $0.5 < \Phi$ | Not allowed | | | | |
| Diameter (mm) | Acceptable Q'ty | | | | | | | | | | | | | |
| $\Phi \leq 0.2$ | Ignore | | | | | | | | | | | | | |
| $0.2 < \Phi \leq 0.5$ | 2 (Distance>5mm) | | | | | | | | | | | | | |
| $0.5 < \Phi$ | Not allowed | | | | | | | | | | | | | |
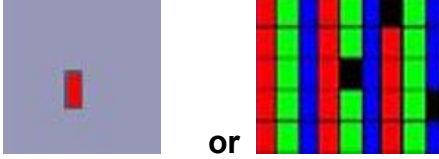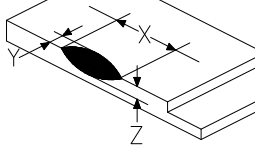
| <p>8.3.3.4</p> | <p>Electrical Defect Dot</p> | <p>Bright dot and Dark dot definition:</p>  <p>or</p>  <p>(Two adjacent dot)</p> <p>Inspection pattern: black, white, red, green, and blue screen.</p> <table border="1" data-bbox="730 730 1441 913"> <thead> <tr> <th>Items</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td>Bright dot</td> <td>$N \leq 4$ (Distance >5mm)</td> </tr> <tr> <td>Dark dot</td> <td>$N \leq 4$ (Distance >5mm)</td> </tr> </tbody> </table> | Items | Acceptable Q'ty | Bright dot | $N \leq 4$ (Distance >5mm) | Dark dot | $N \leq 4$ (Distance >5mm) |
|-----------------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-----------------|-----------------------------------------------------------------------------------------------|----------------------------|----------|----------------------------|
| Items | Acceptable Q'ty | | | | | | | |
| Bright dot | $N \leq 4$ (Distance >5mm) | | | | | | | |
| Dark dot | $N \leq 4$ (Distance >5mm) | | | | | | | |
| <p>8.3.3.5</p> | <p>Glass Defect- Corner chipping</p> |  <table border="1" data-bbox="730 1104 1441 1375"> <thead> <tr> <th>Size(mm)</th> <th>Judgement</th> </tr> </thead> <tbody> <tr> <td> $X \leq 3\text{mm}, Y \leq S,$ $Z \leq T$ (S= ITO length, T=Single glass thickness) </td> <td>Accept</td> </tr> </tbody> </table> | Size(mm) | Judgement | $X \leq 3\text{mm}, Y \leq S,$ $Z \leq T$ (S= ITO length, T=Single glass thickness) | Accept | | |
| Size(mm) | Judgement | | | | | | | |
| $X \leq 3\text{mm}, Y \leq S,$ $Z \leq T$ (S= ITO length, T=Single glass thickness) | Accept | | | | | | | |
| <p>8.3.3.6</p> | <p>Glass Defect- Side fragment</p> |  <table border="1" data-bbox="730 1574 1441 1787"> <thead> <tr> <th>Size(mm)</th> <th>Judgement</th> </tr> </thead> <tbody> <tr> <td> $X \leq 2 \text{ mm}, Y \leq \text{border edge}$ $Z \leq T$ (T= single glass thickness) </td> <td>Accept</td> </tr> </tbody> </table> | Size(mm) | Judgement | $X \leq 2 \text{ mm}, Y \leq \text{border edge}$ $Z \leq T$ (T= single glass thickness) | Accept | | |
| Size(mm) | Judgement | | | | | | | |
| $X \leq 2 \text{ mm}, Y \leq \text{border edge}$ $Z \leq T$ (T= single glass thickness) | Accept | | | | | | | |

8.3.4 Minor defect (Touch Panel)


| Item No. | Inspection content | Judgement |
|----------|--------------------|-----------|
|----------|--------------------|-----------|

File NO.

REV

A/01

<http://www.yes-display.com>
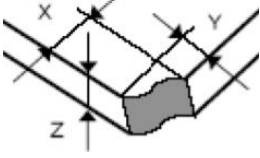
| <p>8.3.4.1</p> | <p>Scratch, dust, particles, foreign materials in “linear type”</p> | <table border="1"> <thead> <tr> <th>Size (mm)</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.05\text{mm}, L \leq 10\text{mm}$</td> <td>Ignore</td> </tr> <tr> <td>$0.05\text{mm} < W \leq 0.07\text{mm}, L \leq 10\text{mm}$</td> <td>3</td> </tr> <tr> <td>$W > 0.07\text{mm}$</td> <td>Reject</td> </tr> </tbody> </table> | Size (mm) | Acceptable Q'ty | $W \leq 0.05\text{mm}, L \leq 10\text{mm}$ | Ignore | $0.05\text{mm} < W \leq 0.07\text{mm}, L \leq 10\text{mm}$ | 3 | $W > 0.07\text{mm}$ | Reject |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------|-------------------------------------------------------------------------------------|--------|------------------------------------------------------------|---|-----------------------------------------|--------|
| Size (mm) | Acceptable Q'ty | | | | | | | | | |
| $W \leq 0.05\text{mm}, L \leq 10\text{mm}$ | Ignore | | | | | | | | | |
| $0.05\text{mm} < W \leq 0.07\text{mm}, L \leq 10\text{mm}$ | 3 | | | | | | | | | |
| $W > 0.07\text{mm}$ | Reject | | | | | | | | | |
| <p>8.3.4.2</p> | <p>Scratch, dust, particles, foreign materials in “round type”</p> | <table border="1"> <thead> <tr> <th>Diameter (mm)</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.25\text{mm}$</td> <td>Ignore</td> </tr> <tr> <td>$0.25\text{mm} < \Phi \leq 0.35\text{mm}$</td> <td>5</td> </tr> <tr> <td>$\Phi > 0.35\text{mm}$</td> <td>Reject</td> </tr> </tbody> </table> | Diameter (mm) | Acceptable Q'ty | $\Phi \leq 0.25\text{mm}$ | Ignore | $0.25\text{mm} < \Phi \leq 0.35\text{mm}$ | 5 | $\Phi > 0.35\text{mm}$ | Reject |
| Diameter (mm) | Acceptable Q'ty | | | | | | | | | |
| $\Phi \leq 0.25\text{mm}$ | Ignore | | | | | | | | | |
| $0.25\text{mm} < \Phi \leq 0.35\text{mm}$ | 5 | | | | | | | | | |
| $\Phi > 0.35\text{mm}$ | Reject | | | | | | | | | |
| <p>8.3.4.3</p> | <p>Air bubbles</p> | <table border="1"> <thead> <tr> <th>Diameter (mm)</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.2\text{mm}$</td> <td>Ignore</td> </tr> <tr> <td>$0.2\text{mm} < \Phi \leq 0.5\text{mm}$</td> <td>3</td> </tr> <tr> <td>$\Phi > 0.5\text{mm}$</td> <td>Reject</td> </tr> </tbody> </table> | Diameter (mm) | Acceptable Q'ty | $\Phi \leq 0.2\text{mm}$ | Ignore | $0.2\text{mm} < \Phi \leq 0.5\text{mm}$ | 3 | $\Phi > 0.5\text{mm}$ | Reject |
| Diameter (mm) | Acceptable Q'ty | | | | | | | | | |
| $\Phi \leq 0.2\text{mm}$ | Ignore | | | | | | | | | |
| $0.2\text{mm} < \Phi \leq 0.5\text{mm}$ | 3 | | | | | | | | | |
| $\Phi > 0.5\text{mm}$ | Reject | | | | | | | | | |
| <p>8.3.4.5</p> | <p>Scratch on printing area</p> | <table border="1"> <thead> <tr> <th>Size (mm)</th> <th>Acceptable Q'ty</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.03\text{mm}, L \leq 5\text{mm}$</td> <td>Ignore</td> </tr> <tr> <td>$0.03\text{mm} < W \leq 0.05\text{mm}, L \leq 5\text{mm}$</td> <td>3</td> </tr> <tr> <td>$W > 0.05\text{mm}$ or $L > 5\text{mm}$</td> <td>Reject</td> </tr> </tbody> </table> | Size (mm) | Acceptable Q'ty | $W \leq 0.03\text{mm}, L \leq 5\text{mm}$ | Ignore | $0.03\text{mm} < W \leq 0.05\text{mm}, L \leq 5\text{mm}$ | 3 | $W > 0.05\text{mm}$ or $L > 5\text{mm}$ | Reject |
| Size (mm) | Acceptable Q'ty | | | | | | | | | |
| $W \leq 0.03\text{mm}, L \leq 5\text{mm}$ | Ignore | | | | | | | | | |
| $0.03\text{mm} < W \leq 0.05\text{mm}, L \leq 5\text{mm}$ | 3 | | | | | | | | | |
| $W > 0.05\text{mm}$ or $L > 5\text{mm}$ | Reject | | | | | | | | | |
| <p>8.3.4.6</p> | <p>Corner chipping</p> | <div style="text-align: center;">  </div> <table border="1"> <thead> <tr> <th>Size(mm)</th> <th>Judgement</th> </tr> </thead> <tbody> <tr> <td>$X \leq 2\text{mm}, Y \leq 2\text{mm}$ $Z < 1/2T$ (T= single glass thickness)</td> <td>Accept</td> </tr> </tbody> </table> | Size(mm) | Judgement | $X \leq 2\text{mm}, Y \leq 2\text{mm}$ $Z < 1/2T$ (T= single glass thickness) | Accept | | | | |
| Size(mm) | Judgement | | | | | | | | | |
| $X \leq 2\text{mm}, Y \leq 2\text{mm}$ $Z < 1/2T$ (T= single glass thickness) | Accept | | | | | | | | | |

File NO.


REV

A/01

<http://www.yes-display.com>

8.3.4.7

Edge chipping

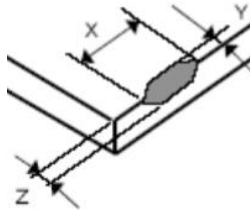

| Size(mm) | Judgement |
|------------------------------------------------------------------------------------------------|-----------|
| $X \leq 3 \text{ mm}$, $Y \leq 3 \text{ mm}$ $Z \leq 1/2 T$ (T= single glass thickness) | Accept |

| | | | | |
|-------------------------------------------------------------------------|--|-----|-------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

9. Reliability Test Conditions and Methods

9.1 Reliability Test Conditions and Methods:

| NO. | TEST ITEMS | TEST CONDITION | INSPECTION AFTER TEST |
|-----|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ① | High Temperature Storage | 80°C±2°C×96Hours | Inspection after 2~4hours storage at room temperature, the samples should be free from defects: 1, Air bubble in the LCD. 2, Seal leak. 3, Non-display. 4, Missing segments. 5, Glass crack. 6, Current IDD is twice higher than initial value. 7, The surface shall be free from damage. 8, The electric characteristic requirements shall be satisfied. |
| ② | Low Temperature Storage | -30°C±2°C×96Hours | |
| ③ | High Temperature Operating | 70°C±2°C×96Hours | |
| ④ | Low Temperature Operating | -20°C±2°C×96Hours | |
| ⑤ | Temperature Cycle(Storage) | -20°C ↔ 25°C ↔ 70°C (30min) ← (5min) → (30min) 1cycle Total 10cycle | |
| ⑥ | Damp Proof Test (Storage) | 50°C±5°C×90%RH×96Hours | |
| ⑦ | Vibration Test | Frequency:10Hz~55Hz~10Hz Amplitude:1.5MM X,Y,Z direction for total 3hours (packing condition test will be tested by a carton) | |
| ⑧ | Drooping Test | Drop to the ground from 1M height one time every side of carton. (packing condition test will be tested by a carton) | |
| ⑨ | ESD Test | Voltage:±8KV,R:330Ω,C:150PF,Air Mode,10times | |

| | | | | |
|---------------------------------------------------------------------------------------|--|------------|---------------------------------------------------------|----------------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

REMARK:

- 1, The Test samples should be applied to only one test item.
- 2, Sample side for each test item is 5~10pcs.
- 3, For Damp Proof Test, Pure water(Resistance > 10MΩ) should be used.
- 4, In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judge as a good part.
- 5, EL evaluation should be accepted from reliability test with humidity and temperature: Some defects such as black spot/blemish can happen by natural chemical reaction with humidity and Fluorescence EL has.
- 6, Failure Judgment Criterion: Basic Specification Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.

| | | | | |
|-------------------------------------------------------------------------|--|-----|--------------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

10. Cautions and Handling Precautions

10.1 Mounting method

The LCD panel of TFT module consists of two thin glass plates with polarizes which easily be damaged. And since the module in so constructed as to be fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be needed when handling the LCD modules.

10.2 Caution of LCD handling and cleaning

When cleaning the display surface, Use soft cloth with solvent

[Recommended below] and wipe lightly

- Isopropyl alcohol
- Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns

Do not use the following solvent on the pad or prevent it from being contaminated:

- Soldering flux
- Chlorine (Cl) , Sulfur (S)

If goods were sent without being silicon coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happen by miss-handling or using some materials such as Chlorine (Cl), Sulfur (S) from customer, Responsibility is on customer.

10.3 Caution against static charge

The LCD module use C-MOS LSI drivers, so we recommended that you:

Connect any unused input terminal to power or ground, do not input any signals before power is turned on, and ground your body, work/assembly areas, and assembly equipment to protect against static electricity.

| | | | | |
|-------------------------------------------------------------------------|--|-----|--------------------------------------------------|---------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

10.4 packing

- Module employs LCD elements and must be treated as such.
- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity

10.5 Caution for operation

- It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage then the limit cause the shorter LCD life.
- An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- Response time will be extremely delayed at lower temperature then the operating temperature range and on the other hand at higher temperature LCD's how dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operation temperature.
- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- Slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.

Usage under the maximum operating temperature, 50%Rh or less is required.

10.6 storing

In the case of storing for a long period of time for instance, for years for the purpose or replacement use, the following ways are recommended.

- Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it. And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light's keeping the storage temperature range.
- Storing with no touch on polarizer surface by the anything else.

[It is recommended to store them as they have been contained in the inner container at the time of delivery from us

10.7 Safety


- It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.

| | | | | |
|---------------------------------------------------------------------------------------|--|------------|---------------------------------------------------------|----------------------------------------------------------------------------|
| 深圳市亿显国际科技有限公司 ShenZhen Yes-Display International Technology CO.,LTD. | | | 3.5 寸液晶显示屏 3.5 Inch LCD Display Screen | |
| File NO. | | REV | A/01 | http://www.yes-display.com |

- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water

11. Packing Method

11.1 Method

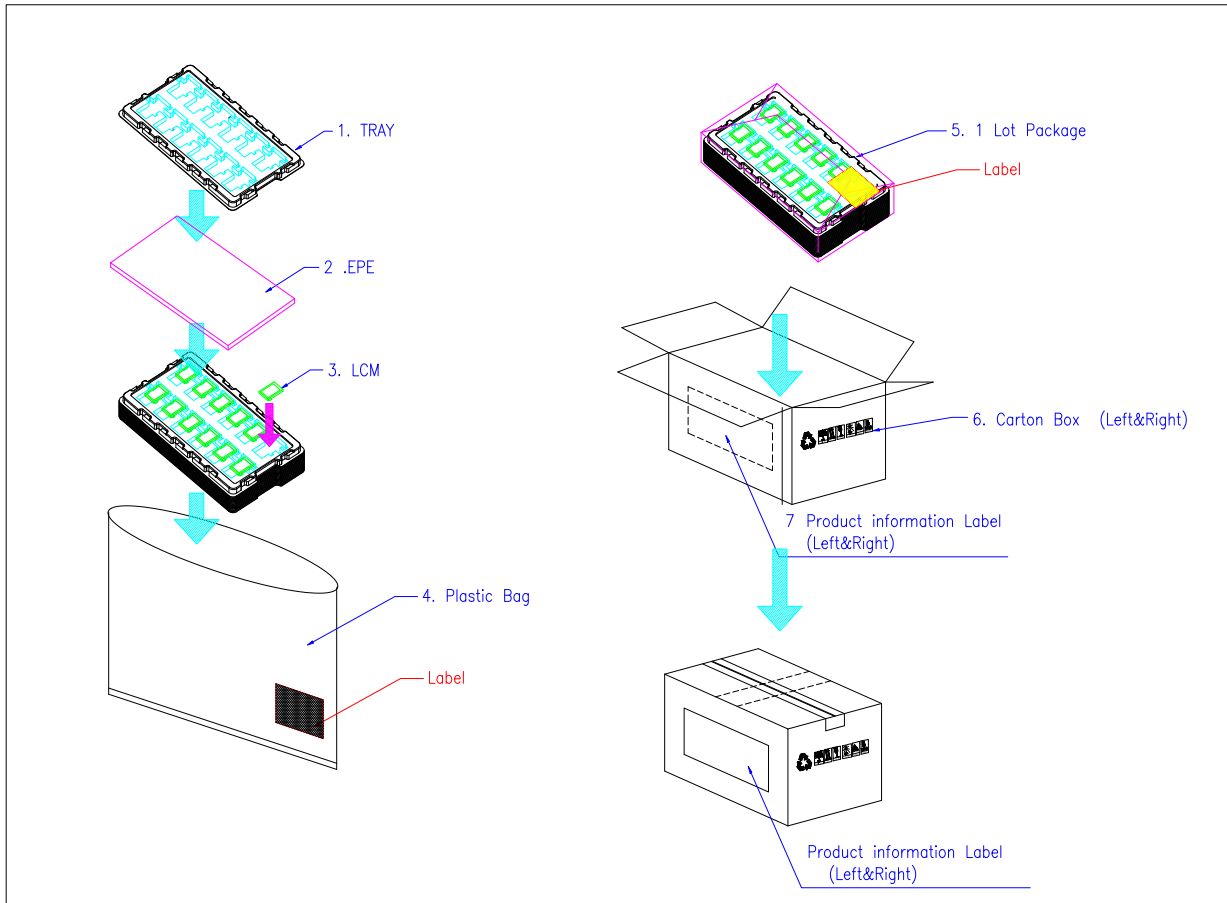

11.2 Packing Label

TBD